

|  |                      |
|--|----------------------|
| CERTIFICATE OF MAILING BY "EXPRESS MAIL"   |                      |
| EXPRESS MAIL LABEL NUMBER  | <u>EL617039276US</u> |
| DATE OF DEPOSIT:   | <u>May 26, 2000</u>  |
| I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE<br>"EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS<br>ADDRESSED TO THE ASSISTANT COMMISSIONER OF PATENTS, BOX PATENT APPLICATION, WASHINGTON, D.C. 20231 |                      |
| <u>Mikhail Bayley</u>  |                      |
| (TYPED OR PRINTED NAME OF PERSON MAILING PAPER)  |                      |
| <u>Mikhail Bayley</u>  |                      |
| (SIGNATURE OF PERSON MAILING PAPER OR FEE)   |                      |

CONTINUA' ON-IN-PART

APPLICATION

For

UNITED STATES LETTERS PATENT

on

THERMOSETTING RESIN COMPOSITIONS CONTAINING MALEIMIDE AND/OR  
VINYL COMPOUNDS

by

Stephen M. Dershem,

Dennis B. Patterson,

and

Jose A. Osuna, Jr.

Sheets of Drawings: None  
Docket No.: QUANT1190-2

Attorneys  
Gray Cary Ware & Freidenrich LLP  
4365 Executive Drive, Suite 1600  
San Diego, California 92121-2189

THERMOSETTING RESIN COMPOSITIONS CONTAINING  
MALEIMIDE AND/OR VINYL COMPOUNDS

Insert  
13

RELATED APPLICATIONS

This application is a continuation-in-part of United States Patent Application Ser. No. 08/300,721, filed September 2, 1994, now pending, which is hereby  
5 incorporated by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates to thermosetting resin compositions and uses therefor. In a particular aspect, the present invention relates to thermosetting  
10 resin compositions containing maleimide resins, vinyl resins, or both.

BACKGROUND OF THE INVENTION

Bismaleimides *per se* occupy a prominent position in the spectrum of thermosetting resins. Indeed, several  
15 bismaleimides are commercially available. Bismaleimide resins are used as starting materials for the preparation of thermoset polymers possessing a wide range of highly desirable physical properties. Depending on the particular resin and formulation, the resins provide cured products  
20 having excellent storage stability, heat resistance, as well as good adhesive, electrical and mechanical properties. Accordingly, bismaleimide resins have been used for the production of moldings, heat-resistant composite materials, high temperature coatings and for the  
25 production of adhesive joints. Typically, however, in any particular resin formulation there is a trade-off between the various properties. For example, in the formulation of "snap" cure adhesives (i.e., adhesives that cure in two

minutes or less at  $\leq 200^{\circ}\text{C}$ ), it is desirable to use a system which does not require the addition of diluent to facilitate handling. In other words, snap cure products require formulations containing 100% reactive materials. 5 Thus, it is desirable to prepare snap cure resins which are liquid at or about room temperature (i.e., low viscosity materials) for ease of handling.

Unfortunately, up until now, it has not proved possible to formulate bismaleimide compositions that are 10 both quick curing, easy to handle (i.e., liquid at or about room temperature), and have low moisture uptake. Consequently, it is a desideratum to provide thermosetting bismaleimide resin compositions that produce cured resins exhibiting a combination of highly desirable physical 15 properties, including a combination of rapid curing and low water absorption.

A particular disadvantage of the use of bismaleimide resins for the types of applications described above is that, at room temperature, such materials exist as 20 solid resins which require the addition of liquid diluents, in order for such resins to achieve a useful and processable viscosity. This difficulty has been compounded by the poor solubility of bismaleimides in organic solvents. This poor solubility generally necessitates the 25 use of polar diluents, such as N-methyl-2-pyrrolidone or dimethylformamide. These diluents are undesirable, *inter alia*, from the viewpoint of environmental pollution. Therefore, it is another desideratum to provide bismaleimide resins that require little, if any, non- 30 reactive diluent to facilitate handling.

One approach to solving the problem of a need for a diluent has been to use reactive liquid diluents. For example, the co-cure of simple bismaleimides with relatively simple divinyl ethers is known in the art. The

use of such diluents is advantageous in that these materials become incorporated into the thermosetting resin composition, and hence do not create disposal problems. However, the range of suitable liquid reactive diluents is very limited. Many of the available diluents are restricted by the low boiling points thereof, and, therefore, the high volatility thereof; by the odor of such materials; by the toxicity of such materials and/or problems with skin irritation induced thereby; by the poor ability of such materials to solubilize bismaleimides; by the high viscosity of such materials, which, again, limits the bismaleimide solubility and also leads to little or no tack in the formulation; by the poor thermal stability and/or hydrolytic stability of such materials; by the incompatibility of such materials with other formulation modifiers, and the like. In particular, since the diluents become an integral component of the thermosetting resin composition, they necessarily influence its properties. Consequently, it is another desideratum to provide combinations of bismaleimide resins with reactive diluents which do not suffer from the above-described drawbacks and that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water absorption.

Accordingly, there has existed a definite need for bismaleimide resins that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water absorption. There has existed a further need for bismaleimide resins that require the additions of little, if any, non-reactive diluent to facilitate handling. And there has existed a still further need for combinations of bismaleimide resins with reactive diluents which do not suffer from the limitations of known reactive resins and that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid


curing and low water absorption. The present invention satisfies these and other needs and provides further related advantages.

#### BRIEF DESCRIPTION OF THE INVENTION

5 In accordance with the present invention, we have developed novel thermosetting resin compositions which meet all of the above-described needs, i.e., produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water  
10 absorption, and which require little, if any, diluent to provide a system of suitable viscosity for convenient handling. In another aspect of the invention, we have developed novel combinations of bismaleimide resins with reactive diluents, which do not suffer from the limitations  
15 of known reactive resins and that produce cured resins exhibiting a combination of highly desirable physical properties, including rapid curing and low water absorption. The resulting cured resins are stable at elevated temperatures, are highly flexible, have low  
20 moisture uptake and good adhesion.

#### DETAILED DESCRIPTION OF THE INVENTION

In accordance with the present invention, there are provided novel maleimide resins of general formula I, as follows:

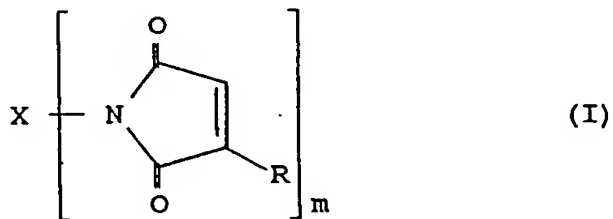

wherein:

$m = 1, 2 \text{ or } 3,$

each R is independently selected from hydrogen or lower alkyl, and

5


X is a monovalent or polyvalent radical selected from:

10

high molecular weight branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,

aromatic groups having the structure:

15

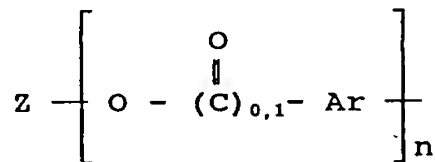

wherein:

20

$n = 1, 2 \text{ or } 3,$

each Ar is a monosubstituted, disubstituted or trisubstituted aromatic or heteroaromatic ring having in the range of 3 up to 10 carbon atoms, and

25

Z is a high molecular weight branched chain alkyl, alkylene or alkylene oxide species having from about 12 to about 500 atoms in the backbone thereof,

30

as well as mixtures thereof.


It is a distinct advantage of the bismaleimide resins of Formula I that they can be used with little, if any, added diluent. Generally, for easy handling and processing, the viscosity of a thermosetting resin composition must fall in the range of about 10 to about 12,000 centipoise, preferably from about 10 to about 2,000 centipoise. Maleimide resins of Formula I typically require no added diluent, or when diluent is used with resins contemplated by Formula I, far less diluent is required to facilitate handling than must be added to conventional maleimide-containing thermosetting resin systems. Preferred maleimide resins of Formula I include stearyl maleimide, oleyl maleimide and behenyl maleimide, 1,20-bismaleimido-10,11-dioctyl-eicosane (which likely exists in admixture with other isomeric species produced in the ene reactions employed to produce dimer acids from which the bismaleimide is prepared, as discussed in greater detail below), and the like, as well as mixtures of any two or more thereof.

When a diluent is added, it can be any diluent which is inert to the bismaleimide resin and in which the resin has sufficient solubility to facilitate handling. Representative inert diluents include dimethylformamide, dimethylacetamide, N-methylpyrrolidone, toluene, xylene, methylene chloride, tetrahydrofuran, methyl ethyl ketone, monoalkyl or dialkyl ethers of ethylene glycol, polyethylene glycol, propylene glycol or polypropylene glycol, glycol ethers, and the like.

Alternatively, the diluent can be any reactive diluent which, in combination with bismaleimide resin, forms a thermosetting resin composition. Such reactive diluents include acrylates and methacrylates of monofunctional and polyfunctional alcohols, vinyl compounds as described in greater detail herein, styrenic monomers (i.e., ethers derived from the reaction of vinyl benzyl

chlorides with mono-, di-, or trifunctional hydroxy compounds), and the like.

Now in accordance with the invention there has been found an especially preferred class of reactive  
 5 diluents corresponding to vinyl or polyvinyl compounds having the general formula:



10

wherein:

q is 1, 2 or 3,

each R is independently as defined above,

15

each Q is independently selected from -O-, -O-C(O)-, -C(O)- or -C(O)-O-, and

Y is selected from:

20

25

30

saturated straight chain alkyl, alkylene or alkylene oxide, or branched chain alkyl, alkylene or alkylene oxide, optionally containing saturated cyclic moieties as substituents on said alkyl, alkylene or alkylene oxide chain or as part of the backbone of the alkyl, alkylene or alkylene oxide chain, wherein said alkyl, alkylene or alkylene oxide species have at least 6 carbon atoms, preferably wherein said alkyl, alkylene or alkylene oxide species are high molecular weight branched chain species having from about 12 to about 500 carbon atoms,




aromatic moieties having the structure:




wherein each R is independently as defined above, Ar is as defined above, t falls in the range of 2 up to 10 and u is 1, 2 or 3,

10 polysiloxanes having the structure:



15 wherein each R is independently defined as above, and each R' is independently selected from hydrogen, lower alkyl or aryl, m' falls in the range of 1 up to 10, n' falls in the range of 1 up to 10, and q' falls in the range of 1 up to 50,

20 polyalkylene oxides having the structure:




25 wherein each R is independently as defined above, r falls in the range of 1 up to 10, s falls in the range of 1 up to 10, and q' is as defined above,

as well as mixtures of any two or more thereof.

Exemplary vinyl or polyvinyl compounds embraced by the above generic structure include stearyl vinyl ether, behenyl vinyl ether, eicosyl vinyl ether, isoeicosyl vinyl ether, isotetracosyl vinyl ether, poly(tetrahydrofuran) divinyl ether, tetraethylene glycol divinyl ether, tris-  
5 2,4,6-(1-vinyloxybutane-4-)oxy-1,3,5-triazine, bis-1,3-(1-vinyloxybutane-4-)oxycarbonyl-benzene (alternately referred to as bis(4-vinyloxybutyl)isophthalate; available from Allied-Signal Inc., Morristown, NJ, under the trade name  
10 Vectomer™ 4010), divinyl ethers prepared by transvinylation between lower vinyl ethers and higher molecular weight di-alcohols (e.g.,  $\alpha,\omega$ -dihydroxy hydrocarbons prepared from dimer acids, as described above; an exemplary divinyl ether which can be prepared from such dimer alcohols is 10,11-  
15 dioctyl eicosane-1,20-divinyl ether, which would likely exist in admixture with other isomeric species produced in ene reactions employed to produce dimer acids), in the presence of a suitable palladium catalyst (see, for example, Example 9), optionally hydrogenated  $\alpha,\omega$ -  
20 disubstituted polybutadienes, optionally hydrogenated  $\alpha,\omega$ -disubstituted polyisoprenes, optionally hydrogenated  $\alpha,\omega$ -disubstituted poly[(1-ethyl)-1,2-ethane], and the like. Preferred divinyl resins include stearyl vinyl ether, behenyl vinyl ether, eicosyl vinyl ether, isoeicosyl vinyl  
25 ether, poly(tetrahydrofuran) divinyl ether, divinyl ethers prepared by transvinylation between lower vinyl ethers and higher molecular weight di-alcohols (e.g.,  $\alpha,\omega$ -dihydroxy hydrocarbons prepared from dimer acids, as described above; an exemplary divinyl ether which can be prepared from such  
30 dimer alcohols is 10,11-dioctyl eicosane-1,20-divinyl ether, which would likely exist in admixture with other isomeric species produced in ene reactions employed to produce dimer acids), in the presence of a suitable palladium catalyst (see, for example, Example 9), and the  
35 like.

Additionally, in accordance with another embodiment of the present invention, it has been found that divinyl compounds corresponding to Formula II where -Q- is -C(O)-O- and Y is a high molecular weight branched chain alkylene species having from about 12 to about 500 carbon atoms are useful thermosetting resin compositions, even in the absence of bismaleimide resins. When combined with suitable amounts of at least one free radical initiator and at least one coupling agent, these divinyl ether resins, alone, are capable of forming thermosetting resin compositions exhibiting excellent physical properties, including rapid cure rates and low water absorption.

In accordance with yet another embodiment of the present invention, there are provided thermosetting resin compositions made of mixtures of a vinyl compound of Formula II and a maleimide corresponding to the following general formula (generally containing in the range of about 0.01 up to about 10 equivalents of vinyl compound per equivalent of maleimide with in the range of about 0.01 up to about 1 eq. being preferred where the vinyl compound is a mono- or polyvinyl ether):

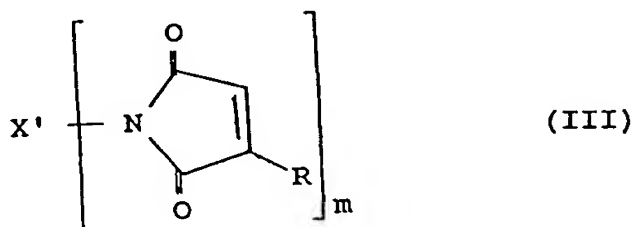

wherein:


m is as defined above,

each R is independently as defined above, and

X' is a monovalent or polyvalent radical selected from:

5 saturated straight chain alkyl or  
alkylene, or branched chain alkyl or  
alkylene, optionally containing  
saturated cyclic moieties as  
substituents on said alkyl or alkylene  
chain or as part of the backbone of the  
10 alkyl or alkylene chain, wherein said  
alkyl or alkylene species have at least  
6 carbon atoms, preferably wherein said  
alkyl or alkylene species are high  
molecular weight branched chain species  
having from about 12 to about 500  
15 carbon atoms,

aromatic groups having the  
structure:

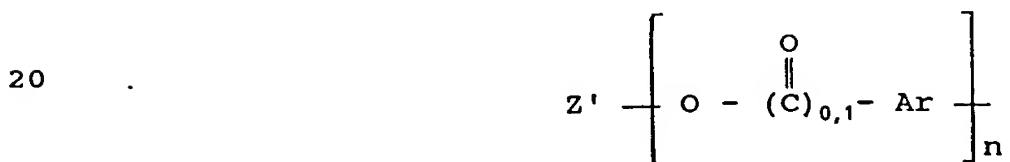


wherein

25 n is as defined above, Ar is as  
defined above, and Z' is a monovalent  
or polyvalent radical selected from:

30 saturated straight chain  
alkyl or alkylene, or branched  
chain alkyl or alkylene,  
optionally containing saturated  
cyclic moieties as substituents  
on said alkyl or alkylene chain  
or as part of the backbone of the  
35 alkyl or alkylene chain, wherein


said species have at least 6 carbon atoms, preferably wherein said species are high molecular weight branched chain species having from about 12 to about 500 atoms as part of the backbone thereof,

siloxanes having the structure:




wherein each R and R' is independently defined as above, and wherein each of m', n' and q is as defined above,

polyalkylene oxides having the structure:



wherein each R is independently as defined above, and wherein each of r, s and q' is as defined above,


aromatic moieties having the structure:



wherein each R is independently as defined above, Ar is as defined above,

and each of t and u is as defined above,

siloxanes having the structure:



5 wherein each R and R' is independently defined as above, and wherein each of m', n' and q' is as defined above,

polyalkylene oxides having the structure:



wherein each R is independently as defined above, and wherein each of r, s and q' is as defined above,

15 as well as mixtures of any two or more thereof.

Such mixtures possess a combination of highly desirable physical properties, including both rapid cure rates and low water absorption.

Exemplary bismaleimides embraced by Formula III  
 20 include bismaleimides prepared by reaction of maleic anhydride with dimer amides (i.e.,  $\alpha, \omega$ -diamino hydrocarbons prepared from dimer acids, a mixture of mono-, di- and tri-functional oligomeric, aliphatic carboxylic acids; dimer acids are typically prepared by thermal reaction of  
 25 unsaturated fatty acids, such as oleic acid, linoleic acid, and the like, which induces an ene reaction, leading to the above-mentioned mixture of components). An exemplary bismaleimide which can be prepared from such dimer amides

is 1,20-bismaleimido-10,11-dioctyl-eicosane, which would likely exist in admixture with other isomeric species produced in the ene reactions employed to produce dimer acids. Other bismaleimides contemplated for use in the practice of the present invention include bismaleimides prepared from  $\alpha,\omega$ -aminopropyl-terminated polydimethyl siloxanes (such as "PS510" sold by Hüls America, Piscataway, NJ), polyoxypropylene amines (such as "D-230", "D-400", "D-2000" and "T-403", sold by Texaco Chemical Company, Houston, TX), polytetramethyleneoxide-di-p-aminobenzoates (such as the family of such products sold by Air Products, Allentown, PA, under the trade name "Versalink" e.g., "Versalink P-650"), and the like. Preferred maleimide resins of Formula III include stearyl maleimide, oleyl maleimide, behenyl maleimide, 1,20-bismaleimido-10,11-dioctyl-eicosane (which likely exists in admixture with other isomeric species produced in the ene reactions employed to produce dimer acids from which the bismaleimide is prepared, as discussed in greater detail elsewhere in this specification), and the like, as well as mixtures of any two or more thereof.

In preferred embodiments of the present invention, when mixtures of bismaleimides and divinyl compounds are employed, either X' (of the bismaleimide) or Y (of the divinyl compound) can be aromatic, but both X' and Y are not both aromatic in the same formulation. Additionally, in preferred embodiments of the present invention, when mixtures of bismaleimides and divinyl compounds are employed, at least one of X' or Y is a high molecular weight branched chain alkylene species having from about 12 to about 500 carbon atoms.

Bismaleimides can be prepared employing techniques well known to those of skill in the art. The most straightforward preparation of maleimide entails formation of the maleamic acid via reaction of the

corresponding primary amine with maleic anhydride, followed by dehydrative closure of the maleamic acid with acetic anhydride. A major complication is that some or all of the closure is not to the maleimide, but to the isomaleimide.

5 Essentially the isomaleimide is the dominant or even exclusive kinetic product, whereas the desired maleimide is the thermodynamic product. Conversion of the isomaleimide to the maleimide is effectively the slow step and, particularly in the case of aliphatic amides, may require

10 forcing conditions which can lower the yield. Nevertheless, in the case of a stable backbone such as that provided by a long, branched chain hydrocarbon (e.g.,  $-(CH_2)_9-CH(C_8H_{17})-CH(C_8H_{17})-(CH_2)_9-$ ), the simple acetic anhydride approach appears to be the most cost effective

15 method. Of course, a variety of other approaches can also be employed.

For example, dicyclohexylcarbodiimide (DCC) closes maleamic acids much more readily than does acetic anhydride. With DCC, the product is exclusively

20 isomaleimide. However, in the presence of suitable isomerizing agents, such as 1-hydroxybenzotriazole (HOBt), the product is solely the maleimide. The function of the HOBt could be to allow the closure to proceed via the HOBt ester of the maleamic acid (formed via the agency of DCC)

25 which presumably closes preferentially to the maleimide. However, it is unclear why such an ester should exhibit such a preference. In any case, it is demonstrated herein that isomide generated by reaction of the bismaleamic acid of 10,11-dioctyleicosane with either acetic acid anhydride

30 or EEDQ (2-ethoxy-1-ethoxycarbonyl-1,2-dihydroquinoline) is isomerized to the bismaleimide by catalytic amounts of HOBt. 3-Hydroxy-1,2,3-benzotriazine-4-one appears to be at least as effective as HOBt in effecting this isomerization, whereas N-hydroxysuccinimide is substantially less so.



Likely, isomerizing agents such as HOBt add to the isoimide to yield the amic acid ester. If this exhibits any tendency whatsoever to close to the imide, much less a strong bias for doing so, a route for  
5 interconverting isoimide and imide is thereby established and the thermodynamic product, imide, should ultimately prevail. Thus if the initial closure of ester formed in the DCC reaction yields any isoimide, or if any isoimide is produced by direct closure of the acid, the situation will  
10 be subsequently "corrected" via conversion of the isoimide to the imide by the action of the active ester alcohol as an isomerizing agent.

One problem encountered with bismaleimides is a proclivity for oligomerization. This oligomerization is  
15 the principle impediment to yield in the synthesis of bismaleimides, and may present problems in use. Radical inhibitors can mitigate this potential problem somewhat during the synthesis but these may be problematic in use. Fortunately, oligomer may be removed by extracting the  
20 product into pentane, hexane or petroleum ether, in which the oligomers are essentially insoluble.

Thermosetting resin compositions of the invention also contain in the range of 0.2 up to 3 wt % of at least one free radical initiator, based on the total weight of  
25 organic materials in the composition, i.e., in the absence of filler. As employed herein, the term "free radical initiator" refers to any chemical species which, upon exposure to sufficient energy (e.g., light, heat, or the like), decomposes into two parts which are uncharged, but  
30 which each possesses at least one unpaired electron. Preferred as free radical initiators for use in the practice of the present invention are compounds which decompose (i.e., have a half life in the range of about 10 hours) at temperatures in the range of about 70 up to  
35 180°C.

Exemplary free radical initiators contemplated for use in the practice of the present invention include peroxides (e.g., dicumyl peroxide, dibenzoyl peroxide, 2-butanone peroxide, *tert*-butyl perbenzoate, di-*tert*-butyl peroxide, 2,5-bis(*tert*-butylperoxy)-2,5-dimethylhexane, bis(*tert*-butyl peroxyisopropyl)benzene, and *tert*-butyl hydroperoxide), azo compounds (e.g., 2,2'-azobis(2-methylpropanenitrile), 2,2'-azobis(2-methylbutanenitrile), and 1,1'-azobis(cyclohexanecarbonitrile)), and the like. Peroxide initiators are presently preferred because they entail no gas release upon decomposition into free radicals. Those of skill in the art recognize, however, that in certain adhesive applications, the release of gas (e.g. N<sub>2</sub>) during cure of the adhesive would be of no real concern. Generally in the range of about 0.2 up to 3 wt % of at least one free radical initiator (based on the total weight of the organic phase) will be employed, with in the range of about 0.5 up to 1.5 wt % preferred.

Thermosetting resin compositions of the invention possess a variety of physical properties making them particularly adapted for use in the preparation of "snap" cure adhesives. Such adhesives are useful, for example, in die attach applications. When used in adhesive applications, it is desirable to add coupling agent(s) to the formulation.

As employed herein, the term "coupling agent" refers to chemical species that are capable of bonding to a mineral surface and which also contain polymerizably reactive functional group(s) so as to enable interaction with the adhesive composition. Coupling agents thus facilitate linkage of the adhesive composition to the substrate to which it is applied.

Exemplary coupling agents contemplated for use in the practice of the present invention include silicate

esters, metal acrylate salts (e.g., aluminum methacrylate), titanates (e.g., titanium methacryloxyethylacetoacetate triisopropoxide), or compounds that contain a copolymerizable group and a chelating ligand (e.g., phosphine, mercaptan, acetoacetate, and the like). Generally in the range of about 0.1 up to 10 wt % of at least one coupling agent (based on the total weight of the organic phase) will be employed, with in the range of about 0.5 up to 2 wt % preferred.

Presently preferred coupling agents contain both a co-polymerizable function (e.g., vinyl moiety, acrylate moiety, methacrylate moiety, styrene moiety, cyclopentadiene moiety, and the like), as well as a silicate ester function. The silicate ester portion of the coupling agent is capable of condensing with metal hydroxides present on the mineral surface of the substrate, while the co-polymerizable function is capable of copolymerizing with the other reactive components of invention adhesive composition. Especially preferred coupling agents contemplated for use in the practice of the invention are oligomeric silicate coupling agents such as poly(methoxyvinylsiloxane).

In addition to the incorporation of coupling agents into invention adhesive compositions, it has also been found that the optional incorporation of a few per cent of the precursor bismaleamic acid greatly increases adhesion. Indeed, good adhesion is retained even after strenuous exposure to water.

Adhesive compositions of the invention possess a combination of physical properties believed to be critical to successful commercial application:

1. The adhesive compositions have good handling properties, needing little, if any, inert

diluent added thereto (i.e., the resin compositions form 100% reactive systems of sufficiently low viscosity);

- 5           2. The adhesive compositions are capable of rapid ("snap") cure, i.e., curing in two minutes or less (preferably as short as 15 seconds) at  $\leq 200^{\circ}\text{C}$ ;
- 10           3. The resulting thermosets are stable to at least  $250^{\circ}\text{C}$ , wherein "stable" is defined as less than 1% weight loss at  $250^{\circ}\text{C}$  when subjected to a temperature ramp of  $10^{\circ}\text{C}/\text{min.}$  in air via thermogravimetric analysis (TGA);
- 15           4. The resulting thermosets are sufficiently flexible (e.g., radius of curvature  $> 1.0$  meter for a  $300 \text{ mil}^2$  silicone die on a copper lead frame using a cured bond line  $\leq 2$  mils) to allow use in a variety of high stress applications;
- 20           5. The resulting thermosets exhibit low-moisture uptake (in nonhermetic packages); and
6. The resulting thermosets exhibit good adhesion to substrates, even after strenuous exposure to moisture.

25           Adhesive compositions of the invention can be employed in the preparation of die-attach pastes comprising in the range of about 10 up to 80 wt % of the above-described thermosetting resin composition, and in the range of about 20 up to 90 wt % filler. Fillers contemplated for  
30 use in the practice of the present invention can be electrically conductive and/or thermally conductive, and/or fillers which act primarily to modify the rheology of the resulting composition. Examples of suitable electrically conductive fillers which can be employed in the practice of  
35 the present invention include silver, nickel, copper, aluminum, palladium, gold, graphite, metal-coated graphite

(e.g., nickel-coated graphite, silver-coated graphite, and the like), and the like. Examples of suitable thermally conductive fillers which can be employed in the practice of the present invention include graphite, aluminum nitride, 5 silicon carbide, boron nitride, diamond dust, alumina, and the like. Compounds which act primarily to modify rheology include fumed silica, alumina, titania, high surface area smectite clays, and the like.

In accordance with yet another embodiment of the 10 present invention, there are provided assemblies of components adhered together employing the above-described adhesive compositions and/or die attach compositions. Thus, for example, assemblies comprising a first article permanently adhered to a second article by a cured aliquot 15 of the above-described adhesive composition are provided. Articles contemplated for assembly employing invention compositions include memory devices, ASIC devices, microprocessors, flash memory devices, and the like.

Also contemplated are assemblies comprising a 20 microelectronic device permanently adhered to a substrate by a cured aliquot of the above-described die attach paste. Microelectronic devices contemplated for use with invention die attach pastes include copper lead frames, Alloy 42 lead frames, silicon dice, gallium arsenide dice, germanium 25 dice, and the like.

In accordance with still another embodiment of the present invention, there are provided methods for adhesively attaching two component parts to produce the above-described assemblies. Thus, for example, a first 30 article can be adhesively attached to a second article, employing a method comprising:

(a) applying the above-described adhesive composition to said first article,

(b) bringing said first and second article into intimate contact to form an assembly wherein said first article and said second article are separated only by the adhesive composition applied in step (a), and thereafter,

5

(c) subjecting said assembly to conditions suitable to cure said adhesive composition.

Similarly, a microelectronic device can be adhesively attached to a substrate, employing a method comprising:

10

(a) applying the above-described die attach paste to said substrate and/or said microelectronic device,

15

(b) bringing said substrate and said device into intimate contact to form an assembly wherein said substrate and said device are separated only by the die attach composition applied in step (a), and thereafter,

20

(c) subjecting said assembly to conditions suitable to cure said die attach composition.

Conditions suitable to cure invention die attach compositions comprise subjecting the above-described assembly to a temperature of less than about 200°C for about 0.25 up to 2 minutes. This rapid, short duration heating can be accomplished in a variety of ways, e.g., with an in-line heated rail, a belt furnace, or the like.

25

In accordance with a still further embodiment of the present invention, there is provided a method for the preparation of bismaleimides from diamines. The invention synthetic method comprises:

30

adding diamine to a solution of maleic anhydride, adding acetic anhydride to said solution once diamine addition is complete, and then allowing the resulting mixture to stir overnight, and thereafter

treating the resulting reaction mixture with a suitable isomerizing agent.

Diamines contemplated for use in the practice of the present invention include saturated and unsaturated dimer diamines (such as the dimer amines sold by Henkel Corporation, Ambler, PA, under the trade name "Versamine 552" and "Versamine 551"),  $\alpha,\omega$ -aminopropyl-terminated polydimethyl siloxanes (such as "PS510" sold by Huls America, Piscataway, NJ), polyoxypropylene amines (such as "D-230", "D-400", "D-2000" and "T-403", sold by Texaco Chemical Company, Houston, TX), polytetramethyleneoxide-di-p-aminobenzoate (such as the family of such products sold by Air Products, Allentown, PA, under the trade name "Versalink" e.g., "Versalink P-650"), and the like. Diamine and maleic anhydride are typically combined in approximately equimolar amounts, with a slight excess of maleic anhydride preferred. Isomerizing agents contemplated for use in the practice of the present invention include 1-hydroxybenzotriazole, 3-hydroxy-1,2,3-benzotriazine-4-one, 1-hydroxy-7-azabenzotriazole, N-hydroxysuccinimide, and the like.

The invention will now be described in greater detail by reference to the following non-limiting examples.

#### EXAMPLE 1

Preparation of the bismaleimide of hydrogenated dimer acid diamine (Henkel Corp. Versamine 552) by closure of the bismaleamic acid with acetic anhydride to a mixture of isomaleimide and maleimide, followed by isomerization of the isomaleimide to maleimide with 1-hydroxybenzotriazole (HOBt) under mild conditions. A solution of 30.0 g of Versamine 552 in 90 mL of anhydrous tetrahydrofuran (THF) was slowly added to a solution of 12.5 g of maleic

anhydride in 60 mL of THF. One hour after completion of the addition, 125 mL of acetic anhydride was added and the reaction mixture stirred overnight under argon atmosphere.

A Fourier transform infrared attenuated total  
5 reflectance (FTIR ATR) spectrum indicated substantial conversion of the amic acid to the isoimide, with little if any amide. The reaction mixture was brought to reflux and maintained there for three hours. FTIR now indicated a mixture of isoimide and maleimide with the former  
10 apparently (uncalibrated spectrum) predominating. Benzoquinone, 0.1 g, was added to the reaction mixture and the solvent/acetic anhydride/acetic acid stripped under vacuum (ultimately 0.1 mm Hg) at 30°C. The resulting residue was taken up in 75 mL of fresh THF and 10.2 g of  
15 HOBt (< 5% H<sub>2</sub>O material) was added and dissolved in at room temperature.

An FTIR spectrum one hour after the addition indicated that the isomaleimide in the mixture had been largely, perhaps completely, consumed. Most of it appeared  
20 to have been converted to maleamic acid HOBt ester. The reaction mixture was stirred overnight. FTIR then indicated essentially complete conversion to the maleimide.

The solvent was stripped off at 30°C and the residue extracted 2X with several hundred mL of pentane.  
25 The combined pentane fractions were chilled in a Dry Ice/isopropyl alcohol bath, which caused a white solid to crystallize out. (The solid is thought to be the acetate of HOBt, with some free HOBt). The pentane suspension was filtered cold, allowed to warm to room temperature, dried  
30 over anhydrous MgSO<sub>4</sub> and the solvent stripped to give 16.9 g (43.8%) of high purity product (as determined by FTIR).



EXAMPLE 2

Bismaleamic acid was generated from 10.0 g of Versamine 552 and 3.9 g of maleic anhydride, each in 40 mL of THF. 2-Ethoxy-1-ethoxycarbonyl-1,2-dihydroquinoline (EEDQ), 9.3 g, was added. Monitoring by FTIR indicated that two days sufficed to effect essentially complete conversion to isomaleimide. HOBt, 4.9 g, was dissolved in the reaction mixture. Monitoring by FTIR indicated that six hours sufficed to convert all the isoimide to imide. The solvent was stripped off and the residue extracted with pentane to yield 6.0 g of product bismaleimide, contaminated with quinoline from the EEDQ.

EXAMPLE 3

E.C. Martin and A.A. DeFusco, in U.S. Statutory Invention Registration No. H424 (2/2/88) teach the preparation of bismaleimide from "dimer diamine" (source not given but material NOT having had the olefinic unsaturation removed) by means of HOBt and DCC. However, the maximum yield of bismaleimide reported is 50%. Thus, following the procedure of Martin and Fusco, the bismaleimide of Versamine 552 (Henkel Corp.) was prepared using dicyclohexylcarbodiimide (DCC) and 1-hydroxybenzotriazole (HOBt). A solution of 50.0 g (0.179 amine equiv) of Versamine 552 in 60 mL of anhydrous tetrahydrofuran (THF) was added slowly under argon atmosphere to a solution of 20.2 g (0.206 mole) of maleic anhydride in 300 mL of THF. The reaction mixture was stirred for an hour after completion of the addition and then 25.2 g (0.186 mole) of HOBt (< 5% H<sub>2</sub>O) was dissolved in. The stirred reaction mixture was chilled in an ice bath and melted DCC added neat in portions to a total of 49.2 g (0.238 mole). After completion of this addition, the reaction mixture was stirred in the ice bath for another hour. The ice bath was then removed and the

stirred reaction mixture allowed to warm to room temperature overnight. The reaction mixture was filtered and the resulting solid was washed with THF. All THF phases were combined, 0.2 g methoxyphenol was added and the THF stripped on a rotary evaporator at 30°C. A thick, semisolid residue resulted. This residue was extracted with hexane and the hexane stripped to give 40.7 g (63.3%) of a product which still had some solid impurity. This material was extracted with pentane, which cleanly separated the solid impurity. The pentane extract was dried over  $\text{MgSO}_4$  and the solvent stripped to give 32.1 g (49.9%) of lightly colored, low viscosity material with the expected FTIR spectrum.

#### Example 3A

The monomaleimide of oleylamine was prepared using a method similar to the one described in Example 3. Oleylamine was obtained from Aldrich Chemical Company (Milwaukee, WI). The amine (40.0 grams, 150 meqs) was dissolved in 100 ml of anhydrous THF. This solution was slowly added (under an argon purge) to a mechanically stirred solution containing maleic anhydride (14.7 g, 150 meqs) dissolved in 100 ml of anhydrous THF. Stirring was continued for another hour after the addition was complete. The stirred reaction mixture was then cooled via an external ice bath and 30.8 g (149 meqs) dicyclohexylcarbodiimide (DCC), dissolved in 30 mls anhydrous THF, was added. The chilled mixture was stirred for an additional hour before 19.7 g (146 meqs) of 1-hydroxybenzotriazole (HOBt) was added. The mixture was allowed to warm up to room temperature while stirring was continued for another sixteen hours. The reaction mixture was filtered and the filtered residue was washed with additional THF. The combined THF solutions were stripped on a rotary evaporator at 40°C until the pressure under full mechanical vacuum was  $\leq 0.5$  torr. The viscous residue

was then dissolved in pentane. The pentane solution was extracted five times with 50 ml portions of aqueous methanol (70% MeOH). Magnesium sulfate was added to the washed pentane solution fraction and it was allowed to settle overnight in a refrigerator. The solution was warmed the next morning to room temperature, filtered, and the solvent stripped off in a rotary evaporator (using water aspirator, followed by full mechanical vacuum until the pressure remained  $\leq 0.5$  torr for one hour). The product recovered was a light brown, low viscosity liquid with an FTIR spectrum consistent with what one would predict for the expected structure.

#### Example 3B

A diacrylate was prepared as follows from the dimer diol derived from oleic acid. This diol was obtained from Unichema North America (Chicago, IL) under the designation Pripol 2033. Approximately 53.8 grams of Pripol 2033 and 22.3 grams of triethylamine (reagent grade from Aldrich Chemical Co., Milwaukee, WI) were dissolved in 136.0 grams of dry acetone. This solution was chilled to 5°C. in an ice bath while the contents of the flask were blanketed under a slow argon purge. The solution was subjected to mechanical stirring while acryloyl chloride (18.1 grams dissolved in 107.3 grams of dry acetone) was added dropwise over a two hour period. Stirring was continued for another hour and the bath was allowed to warm up to room temperature. Approximately 7.1 mg of methoxy hydroquinone (inhibitor) was added to the final reaction product and the acetone was removed on a rotary evaporator. The product was then dissolved in methylene chloride and this solution was then extracted three times with 7% aqueous sodium bicarbonate and another two times with 18 meg-ohm water. The solution was dried over magnesium sulfate and then filtered. Finally, the methylene chloride solvent was removed under full mechanical vacuum on the

rotary evaporator. An FTIR analysis of this product showed a characteristic ester absorption around 1727 wave numbers. The final yield was 71% (based on the starting Pripol 2033).

5

EXAMPLE 4

This example illustrates improvement in yield obtained by using 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO) instead of HOBt. The bismaleamic acid of Versamine 552 was prepared by the dropwise addition over an  
10 hour (dry argon atmosphere) of a solution of 144.0 g of Versamine 552 in 100 mL of dry dichloromethane ( $\text{CH}_2\text{Cl}_2$ ) to a stirred solution of 50.4 g maleic anhydride in 300 mL of dry  $\text{CH}_2\text{Cl}_2$  chilled in an ice bath. The ice bath was removed at the end of the addition and the reaction mixture stirred  
15 for another hour. The ice bath was then put back in place and 84.0 g (100%) of 3-hydroxy-1,2,3-benzotriazin-4-one was added. To the chilled reaction mixture was then added a solution of 106.1 g of DCC in 100 mL of  $\text{CH}_2\text{Cl}_2$  over 30 minutes, with stirring. After completion of the addition,  
20 the ice bath was removed and the reaction mixture stirred overnight at room temperature. The reaction mixture was suction-filtered and the collected solid was washed twice with 100 mL portions of  $\text{CH}_2\text{Cl}_2$ , which were combined with the original  $\text{CH}_2\text{Cl}_2$  filtrate. The  $\text{CH}_2\text{Cl}_2$  was stripped on a  
25 rotary evaporator, at 35-40°C, ultimately under oil-pump vacuum (0.1 Torr). The resulting residue was extracted twice with 500 mL portions of pentane and once with a 1000 mL portion of pentane, all of which were combined and stripped on the rotary evaporator. The original residue  
30 was extracted with more pentane for a final total of four liters of pentane. After condensation to a volume of 500 mL, the solution was stored in the freezer overnight. It was allowed to warm to room temperature, suction-filtered through fine filter paper and the remaining pentane  
35 stripped to yield 145.0 g (80.0%) of the bismaleimide.

EXAMPLE 5

This example demonstrates that a very satisfactory yield may be obtained using much less than an equivalent of the coreactant compound, 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO), and that it may be added after the DCC. The bismaleamic acid of Versamine 552 was generated as in Example 4 from 136.5 g of Versamine 552 and 46.3 g of maleic anhydride, except that the solvent was THF rather than CH<sub>2</sub>Cl<sub>2</sub>. To the chilled (ice bath) reaction mixture was added a THF solution of DCC containing 100.5 g of DCC. After an FTIR spectrum showed that the amic acid had been entirely converted to isoimide, 12 g (15%) of HOBtCO was added and the reaction mixture maintained at 45°C for four hours, which sufficed, by FTIR, to convert the isoimide entirely to imide. Workup as in the preceding example resulted in a yield of 122 g (70%) of the bismaleimide.

EXAMPLE 6

This example illustrates the use of 1-hydroxy-7-aza-1,2,3-benzotriazole (HOAt) as the coreactant compound, again at a low level. Using the procedure described in the preceding example but with 20% HOAt, 51.5 g of Versamine 552 yielded 48.8 g (70.0%) of the BMI. Separation of the HOAt from the reaction product was facile and 4.4 g was recovered.

EXAMPLE 7

The following experiments demonstrate improvements in the yield, obtained by the procedure of Martin and Fusco by changes in procedure and protocol while still using HOBt. The procedure and protocol used is that detailed in Example 4 in which 3-hydroxy-1,2,3-benzotriazin-4-one is used except that the reaction solvent

was THF in all cases here rather than the dichloromethane used in Example 4. A reaction using 100% HOBt gave a yield of 51.9%; four reactions using 80% HOBt gave yields of 56.8, 60.0, 65.1 and 70.2%, respectively. Also, a reaction  
5 employing dimer diamine in which the olefinic unsaturation has not been removed, as in U.S. Statutory Invention Registration No. H424 (Henkel Versamine 551 rather than 552), and 80% HOBt gave a yield of 52.2% of the corresponding BMI.

10                Examples 4-7 show that by variations in solvent and procedures, yields as high as 70% may be obtained using HOBt and as high as 80% using 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO) in lieu of HOBt. Also the realization in the course of the present work that compounds such as HOBt  
15 and HOBtCO are potent agents for the isoimide to imide isomerization means that the reaction may be run with less than a full equivalent of such. The fact that such compounds are first consumed and then liberated during the cyclodehydration, and are thus in principle catalysts, does  
20 not of itself necessarily imply that they may be used at less than a full equivalent since the potentially competing reaction of direct cyclodehydration of the amic acid by DCC to the isoimide would still be of concern. However, as it turns out, HOBt, HOBtCO, and the like are effective at  
25 promoting the facile isomerization which leads to the desired product.

#### EXAMPLE 8

A masterbatch of the bisisomaleimide of Versamine 552 was prepared from 30.0 g of the amine, dissolved in 80  
30 mL of anhydrous THF and added dropwise to a solution of 11.7 g of maleic anhydride in 100 mL of anhydrous THF to yield the bismaleamic acid, followed by the addition of 125 mL of neat acetic anhydride. One half of this reaction mixture was allowed to stand for three days at room

temperature. The solvent and excess acetic anhydride were stripped to leave the isomaleimide. Portions of this isomaleimide were treated as follows. A 5.0 g sample was dissolved in anhydrous THF along with 2.6 g of 3-hydroxy-1,2,3-benzotriazin-4-one (HOBtCO). This solution was allowed to stand overnight, which sufficed to effect complete conversion to the maleimide, ultimately recovered in 56% yield. Another 5.0 g of the isomaleimide was treated with 2.3 g of HOBt in the same manner; a 46% yield of bismaleimide was recovered as well as a larger amount of oligomerized material than in the HBtCO reaction. A third portion of the isomaleimide, 4.9 g, was treated with 2.1 g of N-hydroxysuccinimide in acetonitrile solution. In this case, overnight reflux was used to effect conversion to the maleimide, recovered in only 36% yield.

#### EXAMPLE 9

A divinyl ether was prepared as follows from the dimer diol derived from oleic acid employing Pripol 2033 dimer diol obtained from Unichema North America (Chicago, IL), vinyl propyl ether obtained from BASF Corp. (Parsippany, NJ), and palladium 1,10-phenanthroline diacetate  $[Pd(phen)(OAc)_2]$ . Thus, the Pripol was pre-dried over molecular sieves (3A) approximately 3 hours prior to use. Next, to a clean and dry 1 liter flask, with large oval Teflon stir bar, was added 149.1 grams (523.3 meqs) of Pripol 2033, 280 grams (3256 meqs) of vinyl propyl ether, and 1.0 grams  $Pd(phen)(AcO)_2$  (2.5 meqs). The head space of the flask was purged with argon and the reaction flask fitted with an oil bubbler (to eliminate any pressure build up in the flask). The flask was placed on a magnetic stir plate and stirring initiated and continued for approximately 48 hours. The solution color changed from a light yellow to a deep dark brown. After 48 hours, an aliquot was removed and the bulk of the vinyl propyl ether was blown off using argon. An FTIR analysis was performed

on the residue and it was determined that virtually all the alcohol had reacted (i.e., no OH absorbance between 3400 and 3500  $\text{cm}^{-1}$  remained).

To the original solution approximately 10-15  
5 grams of activated charcoal was added. The solution was mixed for approximately 1 hour on the magnetic stir plate, then about 5 grams of Celite was added. The activated charcoal and Celite were removed via suction filtration through a fritted funnel packed with additional Celite  
10 (about an additional 15 grams). The solution that passed through the funnel retained a slight brown color.

The bulk of the excess vinyl propyl ether was then removed using a rotary evaporator at a bath temperature of 35-40°C under a partial (water aspirator)  
15 vacuum. Once condensation stopped, the cold traps were emptied and replaced. A full mechanical vacuum was then applied and continued at the 35-40°C bath temperature for approximately 1 hour. The vacuum decreased to under 1.0 torr within an hour. Product recovered at this point was  
20 a light brown, low viscosity liquid.

The last traces of propyl vinyl ether were removed using a falling film molecular still (operated at a strip temperature of 70°C and a vacuum of less than one torr). The product residence time in the still head was  
25 about 15 to 20 minutes and the complete stripping procedure required about two hours. The product, following this strip, had no residual odor characteristic of the vinyl propyl ether. Thermogravimetric analysis showed no significant weight loss by 200°C. The product, therefore,  
30 was considered to be free of the vinyl ether starting material and any propyl alcohol co-product.



Example 9A

A divinyl ether was prepared from an alpha-omega terminated, hydrogenated 1,2-polybutadiene. This diol had a molecular weight of approximately 3,000 grams per mole and was obtained from Ken Seika Corporation (Little Silver, NJ) under the trade name GI-3000. The method used to synthesize the divinyl ether was analogous to the one described in Example 9. Approximately 51.5 grams (34.4 meqs) of GI-3000 was dissolved in 158.9 grams (1,840 meqs) of vinyl propyl ether. The mixture was stirred magnetically until a homogeneous solution was obtained. Palladium 1,10-phenanthroline diacetate (0.53 grams, 1.33 meqs) was then added and the entire mixture was allowed to stir for five days at room temperature under an argon atmosphere. An aliquot of the reaction product was removed and the volatiles (vinyl propyl ether and propanol) were blown off. An FTIR trace obtained on this residue demonstrated that the diol had been completely converted to the corresponding divinyl ether.

The bulk of the reaction product was then worked up according to the procedure described in the Example 9. The solution was decolorized using activated charcoal, treated with Celite, and the suspension was then passed through a filter packed with additional Celite. The bulk of the excess vinyl propyl ether and propanol were removed using a rotary evaporator (bath temperature  $\leq 40^{\circ}\text{C}$ ) at full mechanical pump vacuum. Evaporation was continued until the pressure fell to under one torr. The last traces of volatiles were stripped off using a falling film molecular still as described in Example 9. The final product was a viscous (although less so than the starting diol) straw colored liquid.

Example 9B

Another oligomer diol was subjected to transvinylation. The alpha-omega diol of hydrogenated polyisoprene was employed for this example, and is  
5 available from Ken Seika Corporation under the designation "TH-21". This oligomer has an approximate molecular weight of 2,600 grams per mole. The same method as described in Example 9 was used to convert this diol to the  
10 corresponding divinyl ether. Thus, TH-21 (52.0 grams, 40 meqs) was dissolved in 83.7 grams of vinyl propyl ether (972 meqs) and 0.4 grams (1.0 meq) of palladium 1,10-phenanthroline diacetate catalyst was added. The mixture was stirred magnetically at room temperature under an argon  
15 atmosphere for six days. An evaporated aliquot of the reaction mixture was found to be essentially free of alcohol functionality according to FTIR analysis. The bulk of the reaction product was worked up as per the method described in Example 9. The final product was an amber, viscous liquid (again the viscosity of the divinyl compound  
20 was considerably lower in viscosity than the starting diol).

Example 9C

Iso-eicosyl alcohol, obtained from M. Michel and Co., Inc. (New York, NY) was transvinylated according to  
25 the method described in Example 9. The alcohol (100.3 grams, 336 meqs) was dissolved in 377.4 grams of the vinyl propyl ester (4,383 meqs) and 1.0 gram (2.5 meqs) of palladium 1,10-phenanthroline diacetate catalyst was added. The mixture was magnetically stirred under an argon  
30 atmosphere for four days. An FTIR trace of the evaporated reaction product showed that no detectable alcohol residue remained. The product was worked up as previously described. The final material was a pale yellow liquid with a "water-like" viscosity.

Example 9D

Behenyl alcohol (1-docosanol), obtained from M. Michel and Co., Inc. (New York, NY) was transvinylated substantially as described in Example 9, however, since the starting alcohol was a waxy solid with limited room temperature solubility in vinyl propyl ether, it was necessary to conduct the reaction at an elevated temperature. Thus, a mixture of the alcohol (100.8 grams, 309 meqs), vinyl propyl ether (406.0 grams, 4,714 meqs), and palladium 1,10-phenanthroline diacetate catalyst (1.0 gram, 2.5 meqs) was magnetically stirred at 50°C under an argon atmosphere for 20 hours. Analysis of an evaporated aliquot after this period showed that no detectable alcohol remained. The behenyl vinyl ether was worked up as described above. The final product was an off-white waxy solid.

EXAMPLE 10

An organic adhesive vehicle was prepared using 2.78 grams (1.0 equivalents) of the BMI prepared according to Example 8, 0.94 grams (0.5 equivalents) of the divinyl ether prepared according to Example 9, and 0.58 grams (0.5 equivalents) of Vectomer 4010 (i.e., bis(4-vinyloxybutyl) isophthalate). An additional 1% by weight dicumyl peroxide (initiator), 0.5% gamma-methacryloxypropyltrimethoxysilane (coupling agent), and 0.5% beta-(3,4-epoxycyclohexyl)ethyltrimethoxysilane (coupling agent) were added to complete the organic adhesive mix.

Twenty-two percent by weight of the organic adhesive mixture was added to 78% by weight of silver metal filler. The mixture was stirred under high shear until homogeneous. The resulting paste was then degassed at 1 torr. The paste was dispensed onto silver plated copper lead frames using a starfish dispense nozzle. Bare silicon

dice (300 x 300 mils on a side) were then placed on top and compressed into the adhesive until a 2.0 mil bondline had been attained (this process is virtually instantaneous when using automated "pick and place" equipment. The assembled parts were then cured on a heated surface (hot plate) controlled at 200°C for two minutes. Additional void test parts (which were assembled in parallel using a 300 x 300 glass slide to replace the silicon die) showed the cured adhesive film to be free of voiding. Half of the assembled parts were subjected to tensile test immediately. The other half were placed in a pressure cooker at 121°C for 168 hours (i.e., one week). The pressure cooker is considered to be a very aggressive test that has predictive value for the long term robustness of adhesives used in non-hermetic environments.

Adhesion strength testing was performed on these parts using a "Tinius Olsen 10,000" tensile test machine. Steel cube studs (0.25 x 0.25 x 0.8 inches) were attached at room temperature to the top of the die and the bottom of the lead frame using Loctite 415 cyanoacrylate glue. The cubes were attached using a V-block fixturing device to assure their co-linearity. Once the room temperature gluing operation was complete (~one hour later), the entire assembly was loaded into the tensile test machine. Pins were used to secure the steel blocks (through holes present in each of the test blocks) to the upper and lower arms of the stud pull machine. The tensile pull speed used was 3.00 inches per minute, and the adhesion measurement was recorded in terms of pounds of force. The tensile test results for the initial and post pressure cooker parts are presented in Table 1.

Table 1

|    | <u>Initial Adhesion (lbs)</u> | <u>Retained Adhesion (lbs)</u> |
|----|-------------------------------|--------------------------------|
|    | 191                           | 141                            |
|    | 169                           | 147                            |
| 5  | 179                           | 112                            |
|    | 180                           | 153                            |
|    | 166                           | 126                            |
|    | 155                           | 138                            |
|    | 174                           | 161                            |
| 10 | 175                           | 121                            |
|    | 111                           | 133                            |
|    | 149                           | 149                            |
|    | 164                           | 154                            |
| 15 | 144                           | 119                            |

As the results in Table 1 demonstrate, the product was found to have good initial and retained adhesion. The average adhesion for the parts prior to pressure cooker treatment was 163 pounds and after pressure cooker it was 138 pounds. Thus, even after one full week at two atmospheres pressure of steam (14.7 psig, 121°C) about 85% of the initial adhesion was retained. It is noteworthy that a competitive material which was run at the same time had an initial adhesion of 338 pounds, but dropped down to zero after the pressure cooker treatment.

Example 10A

A composition was formulated using a monovinyl ether diluent and a divinyl ether "rubber" comonomer. The addition of these materials was used to enhance certain properties of the adhesive composition. Specifically, the monovinyl ether was used to reduce the viscosity and increase the thixotropic index (defined as the quotient of the 1 rpm over the 20 rpm viscosity). The "rubber" comonomer was used to "flexibilize" the cured adhesive. Flexibility is especially important when thin bondlines are used since stress increases as bondline decreases. A convenient measure of stress for a cured part is the radius

of curvature (ROC). This measurement is traditionally done with a surface profilometer and is an index of the "bowing" of the silicon die. The higher the ROC (i.e., the larger the sphere described by measured arc) the lower the stress.

- 5 It is generally desirable to have an ROC  $\geq$  one meter. The composition described in Example 10 results in a radius of curvature of greater than 1.5 meters when used at a 2.0 mil bondline, but gives a ROC of less than one meter when the bondline is reduced to 1.0 mils.

- 10           The monovinyl ether diluent used, vinyl octadecyl ether, was purchased from BASF Corp. (Parsippany, NJ). The divinyl ether "rubber" was the product described in Example 9B. An organic adhesive vehicle was prepared using 1.29 grams (3.7 meqs) of the BMI prepared according to Example  
15 8, 0.1125 grams (0.38 meqs) vinyl octadecyl ether, and 0.1127 grams (0.08 meqs) of the divinyl ether prepared according to Example 9B. An additional 1.0% by weight dicumyl peroxide (initiator) and 2.7% gamma-methacryloxy-propyltrimethoxysilane coupling agent were added to  
20 complete the organic adhesive mix.

- Twenty-seven percent by weight of the above organic adhesive mixture was added to 73% by weight of silver filler. The mixture was homogenized under high shear and then degassed using a full mechanical pump  
25 vacuum. The adhesive was dispensed into silver plated copper lead frames using a starfish dispense nozzle. Bare silicon dice (300 x 300 mil on a side) were placed on top and compressed into the adhesive to achieve a 1.0 mil bondline. A similar set of parts was generated using the  
30 adhesive composition described in Example 10. The parts were cured for one minute at 200°C. The radius of curvature for parts using the adhesive described here was 1.29 meters. The ROC for the control parts was 0.76 meters. The 10 rpm viscosity (Brookfield viscometer) for  
35 the adhesive described here was 5,734 centipoise at 25.0°C

and the thixotropic index was 6.60. The control adhesive had a 12,040 10 rpm viscosity at 25.0°C and a thixotropic index of 4.97. The post cure adhesion results for the adhesive described here and the control were as follows:

5

Table 2

|    | Adhesion for Test Paste | Adhesion for Control |
|----|-------------------------|----------------------|
|    | (lbs)                   | (lbs)                |
|    | 157                     | 72                   |
|    | 149                     | 139                  |
| 10 | 154                     | 175                  |
|    | 134                     | 149                  |
|    | 158                     | 97                   |
|    | 159                     | 136                  |
| 15 |                         |                      |

The results presented here demonstrate that several of the adhesive composition properties can be improved with little or no sacrifice of initial adhesion by the incorporation of modest amounts of a reactive diluent and a flexibilizing comonomer.

20

Example 10B

The previous examples demonstrated how adhesive compositions could be formulated in which no more than one equivalent of vinyl ether comonomer is used in conjunction with an excess of a bismaleimide. It is not necessary to have any vinyl ether present in the composition, however. That is to say, that compositions may be formulated where maleimide is the only polymerizable function.

25

Thus, an organic adhesive vehicle was prepared using 96.25% by weight of the BMI prepared according to Example 8, 1% by weight USP90MD [1,1 bis(t-amyl peroxy)

30

cyclohexane - an initiator available from Witco Corporation, Marshall, TX], 0.76% gamma-methacryloxypropyl-trimethoxysilane (coupling agent), and 1.72% beta-(3,4-epoxycyclohexyl)ethyltrimethoxysilane (coupling agent).

5                   Twenty-five percent by weight of the above organic adhesive mixture was added to 75% by weight of silver metal filler. The mixture was sheared and degassed as before. Dispense and die placement were performed as described earlier (300 x 300 mil silicon die on Ag coated  
10 Cu lead frames). The bondline used was 1.0 mils and the cure time was one minute at 200°C. Initial and post pressure cooker (16 hour) adhesion values are presented in the following table.

Table 3

| 15 | Initial Adhesion<br>(lbs) | Post Pressure Cooker Adhesion<br>(lbs) |
|----|---------------------------|--|
|    | 165                       | 83                                     |
|    | 137                       | 188                                    |
|    | 115                       | 143                                    |
| 20 | 171                       | 122                                    |
|    | 148                       | 208                                    |
|    | 154                       | 200                                    |

25                   This composition exhibited a narrow exotherm with a maxima at 128.8°C via differential scanning calorimetry (DSC) and a weight loss of less than 0.75% by 350°C according to TGA (10°C/min. using an air purge). This composition therefore demonstrates the viability of an "all  
30 maleimide" snap cure adhesive system.



Example 10C

The previous examples have demonstrated the utility of maleimide/vinyl ether co-cure and maleimide homocure for use as adhesives. Other polymerizable functional groups including acrylate and methacrylate may also be used alone or in combination with maleimide and/or vinyl ether monomers.

Thus, an organic adhesive vehicle was prepared using 4.00 grams of the diacrylate prepared according to Example 3B, 1.00 gram decanendiol dimethacrylate (purchased from Polysciences, Inc., Warrington, PA), and 1.00 gram Ricon R-130 Epoxy (obtained from Advanced Resins, Inc., Grand Junction, CO). Two percent by weight of dicumyl peroxide initiator was dissolved in this mix.

Twenty percent by weight of the organic adhesive mixture was added to 80% by weight silver metal filler. The mixture was homogenized using high shear and then degassed. Parts were assembled as before using 300 x 300 silicon on Ag plated Cu lead frames. The cure condition was 200°C for one minute, and the bondline thickness used was 1.0 mil. The initial adhesion values and the corresponding failure mode information is presented in the following table:

Table 4

|    | <u>Initial Adhesion (lbs)</u> | <u>Failure Mode (lbs)</u> |
|----|-------------------------------|---------------------------|
| 25 | 66                            | material                  |
|    | 55                            | material                  |
|    | 67                            | material                  |
|    | 62                            | material                  |
| 30 | 63                            | material                  |
|    | 59                            | material                  |

The measured adhesion for this mixture was lower than observed for most of the BMI containing compositions. The failure mode, however, was of the most preferred (all material) type (i.e., entirely cohesive rather than adhesive failure). The radius of curvature for the cured adhesive at the bondline thickness used here was 2.51 meters.

#### EXAMPLE 11

A test paste was made that contained one equivalent each of the bismaleimide of Versalink 650 (polytetramethyleneoxide-di-p-aminobenzoate, marketed by Air Products, Allentown, PA) and the divinyl ether of tetraethylene glycol. The organic phase had 1% by weight of dicumyl peroxide. Seventy-five percent by weight silver filler was used in the paste. Ten parts were assembled and cured as per the preceding example using this paste that contained no coupling agent. One percent by weight of the same mixed coupling agents noted above were then added to the paste. Another ten parts were assembled and cured using this new paste mix. Both groups of parts were then divided into two sets. Half of the parts from each group was tested for tensile strength immediately and the other half following four hours of immersion in the pressure cooker. Tensile strength measurements were performed according to the procedure described in Example 10. The results of this testing are summarized in Table 5.

Table 5  
Tensile Strength of Adhesive Bond

| No Coupling Agent |   | With Coupling Agent                       |  |
|-------------------|---|---|--|
| 5                 | <u>Initial Value</u> <u>Post Moisture</u> | <u>Initial Value</u> <u>Post Moisture</u> |  |
|                   | 110.7                      0              | 112.3                      88.8           |  |
|                   | 111.2                      0              | 102.6                      84.3           |  |
|                   | 107.7                      0              | 108.5                      83.8           |  |
|                   | 110.5                      0              | 109.2                      87.9           |  |
| 10                | 106.5                      0              | 115.6                      93.3           |  |

The data in Table 5 shows that the presence of the coupling agents has a dramatic impact on the survival of the adhesive bond in extreme moisture environments.

#### EXAMPLE 12

A test was conducted to test the adhesion performance of invention compositions following a one minute cure at 200°C. The bondline used for these parts was also dropped from 2.0 down to 1.0 mils during the attach step. Stress, which is induced by the large thermal mismatch between the silicon and lead frame, increases when the bondline is decreased. The organic adhesive portion of paste consisted of one equivalent each of the BMI prepared according to Example 8, and Vectomer 4010 (i.e., bis(4-vinyloxybutyl)isophthalate). It also contained 4.5% of gamma-methacryloxypropyl-trimethoxysilane coupling agent, as well as 0.95% dicumyl peroxide initiator. A paste was made consisting of 22% by weight of this adhesive composition and 78% by weight of silver flake. The paste was degassed and then used to attach 300 x 300 mil silicon die to silver plated copper lead frames using the reduced bondline and cure time. Six parts were assembled and cured. Two void test parts (same conditions but using 300 x 300 mil glass slides to replace the silicon die) were

also made. There was no evidence of porosity in the void test parts. Tensile strength measurements were performed according to the procedure described in Example 10. The tensile test values for the other parts were: 116, 114,  
5 119, 122, 128 and 134 pounds force.

While the invention has been described in detail with reference to certain preferred embodiments thereof, it will be understood that modifications and variations are within the spirit and scope of that which is described and  
10 claimed.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2